

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04R 25/02		A1	(11) International Publication Number: WO 99/27755
			(43) International Publication Date: 3 June 1999 (03.06.99)
<p>(21) International Application Number: PCT/AU98/00888</p> <p>(22) International Filing Date: 27 October 1998 (27.10.98)</p> <p>(30) Priority Data: PP 0520 24 November 1997 (24.11.97) AU</p> <p>(71) Applicant (for all designated States except US): NHAS NATIONAL HEARING AIDS SYSTEMS [AU/AU]; 126 Greville Street, Chatswood, NSW 2067 (AU).</p> <p>(72) Inventors; and (75) Inventors/Applicants (for US only): LOI, Teck, Enn [AU/AU]; 11 Boulton Street, Putney, NSW 2112 (AU). HALL, Matthew, James [AU/AU]; 3/78 City Road, Chippendale, NSW 2008 (AU).</p> <p>(74) Agent: SPRUSON & FERGUSON; G.P.O. Box 3898, Sydney, NSW 2001 (AU).</p>		<p>(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p>Published With international search report.</p>	
<p>(54) Title: HEARING AID</p> <p>(57) Abstract</p> <p>A hearing aid includes a faceplate (2) and a matching adaptor plate (4) below it. These plates are held in together by fasteners such as clips or screws (12). The faceplate and adaptor plate are custom cut and trimmed to seamlessly match a custom shell (9). Only the adaptor plate (4) is glued to the shell (9). A boundary (5b) between the faceplate (2) and the adaptor (4) is not visible on the hearing aid when worn by a user. Furthermore, the position of boundary B enables a reduction in the visible surface area of the faceplate (2) to be achieved.</p>			

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

HEARING AID

Technical Field

The present invention relates to hearing aids and, in particular, to an "in the ear" (ITE) hearing aid.

Background of the Invention

5 ITE (In The Ear) hearing aids appeared in the early 1970's, and have become the most popular type of hearing aid currently used. Depending on the space occupied by the hearing aid, ITE hearing aids have been further categorised as Completely-In-Canal (CIC), In-The-Canal (ITC), Half Concha (ITE) and Full Concha (ITE). The
10 term ITE as used herein applies to all these categories of hearing aids.

The internal components of ITE hearing aids are generally housed in earshells which are custom made to fit the intended wearer's ear. Components which make up the hearing aid, such as the battery holder, contacts, microphone, amplifier, switches and other user controls are built in a cluster on a plastic plate which is commonly called
15 a faceplate. An earshell custom made to fit each individual ear is made in accordance with an impression made of the ear. The faceplate is trimmed to match the earshell. With the earphone mounted in the shell, the trimmed faceplate is bonded to the custom earshell with a solvent glue or adhesive. This form of construction is often referred to as a custom ITE.

20 Alternatively, the bulk of the components can be built in the form of a module. The module generally fits into an adaptor plate and is removably held onto the adaptor plate by fasteners such as screws or clips. The adaptor plate is then glued to the customised earshell, and trimmed to physically match the custom shell. The most common form of this construction is often referred to as semi-modular. This term is
25 used because the earphone is generally mounted in the shell by means of an output tube which is glued to the shell at the shell tip. When the module is unfastened from the adaptor, the earphone wiring is still connecting the module and the custom earshell.

Custom ITE hearing aids are often difficult and time consuming to repair, as the faceplate must be removed from the earshell to allow access to the components.
30 Modular or semi-modular ITE hearing aids are easier to repair than custom hearing aids, as the module on which the components are mounted is easier to remove and replace. However, the smallest possible size of the module dictates the size of the outer surface of the hearing aid, as the adaptor used to attach the module to the earshell must not be cut too close to the join between the adaptor and the module. Further, this join
35 is usually cosmetically unappealing. It is not practical to add any desired additional components on the aid even though the shell opening may be sufficiently larger than the module to accommodate such components.

Object of the Invention

It is an object of the present invention to overcome or substantially ameliorate at least some of the above disadvantages.

Summary of the Invention

5 The present invention in one broad form provides an in-ear type hearing aid comprising:

a shell for placement in an ear, said shell comprising an outer opening, said shell being adapted to house electrical components therein;

a top plate having an outer periphery; and

10 a bottom plate having an outer periphery and an opening, said bottom plate being fixed to said shell over said opening in said shell, said top plate being removably attached to said bottom plate, wherein the outer periphery of said top plate substantially corresponds in size and shape to the outer periphery of said bottom plate.

Preferably, at least some of said electrical components are mounted on said top plate and extend into the shell through said opening in said bottom plate. Examples of 15 these electrical components include a battery, microphone, and amplifier, but may also include components such as a volume control, on/off switch, telecoil selector, program selector etc.

Preferably, said bottom plate is glued, adhered by means of a solvent, or fused 20 onto the shell around its outer periphery.

Preferably, said top plate is releasably attached to the bottom plate by means of one or more screws.

Preferably, the outer peripheries of said bottom plate and said top plate correspond in size and shape to said outer opening in said shell.

25 The present invention in another broad form provides a method of assembling a hearing aid, said method comprising the steps of:

providing a shell for placement at least partly within an ear, said shell comprising an outer opening;

30 providing a bottom plate at least as large as the outer opening in said shell, said bottom plate comprising an opening;

providing a top plate at least as large as the outer opening in said shell;

releasably mounting said top plate on said bottom plate;

fixing said bottom plate onto said shell over said outer opening; and

35 trimming the outer peripheries of said top plate and said bottom plate to substantially the same size and shape.

Preferably, the bottom plate and top plate are trimmed to substantially the same size and shape as the outer opening in said shell.

Preferably, said method further comprises the step of mounting one or more electrical components onto said top plate, said electrical components extending into said shell through said opening in said bottom plate.

The present invention in another broad form provides, in combination:

- 5 a top plate removably mounted on a bottom plate, said bottom plate adapted to be fixed onto a shell of an in-the-ear type hearing aid over an outer opening in said shell, said bottom plate having an opening therein, wherein the outer peripheries of said top plate and said bottom plate are substantially the same shape and size.

Preferably, one or more electrical components are mounted on said top plate
10 and extend into said shell through said opening in said bottom plate.

Brief Description of the Drawings

Preferred forms of the present invention will now be described by way of example with reference to the accompanying drawings wherein:

Figure 1 is a cross section of a known semi-modular hearing aid;

15 Figure 2 is a cross section of a known custom hearing aid; and

Figure 3 is a cross-section of a preferred embodiment of the present invention.

Detailed Description of the Preferred Embodiments

Similar reference numerals are used throughout the drawings indicate similar components.

20 Figure 1 illustrates the construction of a known semi-modular custom type of hearing aid. Components such as a microphone 1, coil 10, battery holder and cover 14, battery contacts (not shown) and amplifier 6 are built on a plastic frame or body 3 in fixed positions. Additional components which may be included in some models are also built on the body. These additional components may include volume control, a
25 programming socket, a program selector, a microphone-telecoil selector and an on/off switch. The position of the amplifier 6 may not be fixed but is usually close to the module 3 as there are numerous connections therebetween. The earphone 7 is generally built with the module but physically connected with wires (not shown) which are long enough to allow mounting of the earphone 7 in the earshell 9. The earphone tube 8 is
30 glued to the tip of the earshell 9. An adaptor plate 4 is cut and trimmed to match the earshell 9 which is custom made for each individual ear. The trimmed adaptor plate 4 is attached to the shell by solvent or adhesive 11. After the earphone is mounted in the shell, the assembly is completed by mounting the module 3 onto the adaptor 4. The module is held in place by fixtures 12 such as screws, clips or jams.

35 The module and adaptor boundary 5a is on the visible surface of the hearing aid when worn. The boundary 5a is fixed and is generally determined by the shape of the module 3. The adaptor plate 4 can be trimmed close to but not directly up to the

module boundary. For cosmetic reasons some designs attempt to hide this visible boundary from view by enlarging the battery cover 14. However, the above described problems still exist.

5 With a modular or semi-modular construction, ungluing of the shell 9 from the remainder of the hearing aid is not required for most repairs, as the body 3 (along with the components assembled thereon), can be unscrewed from the adaptor plate 4 and replaced.

10 Figure 2 illustrates the construction of a known custom hearing aid. The custom hearing aid comprises a single faceplate 2 (commonly referred to as the custom faceplate) instead of the module body and adaptor plate employed by the semi-modular hearing aid illustrated in Figure 1. Components of the custom hearing aid are built onto the faceplate 2. The faceplate 2 is custom trimmed and then attached to the shell 9 by a solvent glue or an adhesive. The (horizontal) boundary 5a visible in the semi-modular hearing aid shown in Figure 1 is not present. If other components such as a
15 volume control are desired, and the shell 9 is large enough, these components are accommodated within the trimmed area of the faceplate 2. Custom hearing aids can be made smaller than modular aids as the boundary 5a on the modular aid takes up additional volume and surface area.

Figure 3 illustrates a preferred embodiment of the present invention. A
20 conventional faceplate 2, on which components are mounted has a matching adaptor plate 4 below it. The two layers are held together by fasteners such as clips or screws 12. Both layers are custom cut and trimmed to seamlessly match the custom shell 9. Only the adaptor plate 4 is glued to the shell 9. The peripheral surfaces at which the faceplate 2 and adaptor plate 4 are in transition are indicated by reference 5b in Figure
25 3. This boundary surface is substantially vertical (taken in the orientation of Figure 3) and therefore the join line at the boundary 5b is not visible when the hearing aid is in use. By comparison, the transition line 5a in the prior art embodiment of Figure 1 for example is clearly visible when the hearing aid of Figure 1 is in use. Further, this boundary 5b does not take up any surface area on the outside of the hearing aid, and
30 does not impose a fixed surface shape on the hearing aid. If another component, such as a volume control, is desired, and the shell 9 is large enough, it can be added on within the trimmed area of the faceplate 2. The advantages of a modular hearing aid are retained, as the faceplate 2 on which the components of the hearing aid are mounted can be removed for repair by simply unscrewing the screw 12, and then replaced. It
35 can be seen that the present invention is suitable for both modular and semi-modular hearing aids.

CLAIMS:

1. An in-ear type hearing aid comprising:
 - a shell for placement in an ear, said shell comprising an outer opening, said shell being adapted to house electrical components therein;
 - 5 a top plate having an outer periphery; and
 - a bottom plate having an outer periphery and an opening, said bottom plate being fixed to said shell over said opening in said shell, said top plate being removably attached to said bottom plate, wherein the outer periphery of said top plate substantially corresponds in size and shape to the outer periphery of said bottom plate.
- 10 2. The hearing aid of claim 1, wherein at some of said electrical components are mounted on said top plate and extend into the shell through said opening in said bottom plate. Examples of these electrical components include a battery, microphone, and amplifier, but may also include components such as a volume control, on/off switch, telecoil selector, program selector etc.
- 15 3. The hearing aid of claim 1, wherein said bottom plate is glued, adhered by means of a solvent, or fused onto the shell around its outer periphery.
4. The hearing aid of claim 1, wherein said top plate is releasably attached to the bottom plate by means of one or more screws.
5. The hearing aid of claim 1, wherein the outer peripheries of said
20 bottom plate and said top plate correspond in size and shape to said outer opening in said shell.
6. A method of assembling a hearing aid, said method comprising the steps of:
 - providing a shell for placement at least partly within an ear, said shell
25 comprising an outer opening;
 - providing a bottom plate at least as large as the outer opening in said shell, said bottom plate comprising an opening;
 - providing a top plate at least as large as the outer opening in said shell;
 - releasably mounting said top plate on said bottom plate;
 - 30 fixing said bottom plate onto said shell over said outer opening; and
 - trimming the outer peripheries of said top plate and said bottom plate to substantially the same size and shape.
7. The method of claim 6, wherein the bottom plate and top plate are trimmed to substantially the same size and shape as the outer opening in said shell.
- 35 8. The method of claim 6, further comprising the step of mounting one or more electrical components onto said top plate, said electrical components extending into said shell through said opening in said bottom plate.
9. In combination:

a top plate removably mounted on a bottom plate, said bottom plate adapted to be fixed onto a shell of an in-the-ear type hearing aid over an outer opening in said shell, said bottom plate having an opening therein, wherein the outer peripheries of said top plate and said bottom plate are substantially the same shape and size.

- 5 10. The combination of claim 9, wherein one or more electrical components are mounted on said top plate and extend into said shell through said opening in said bottom plate.

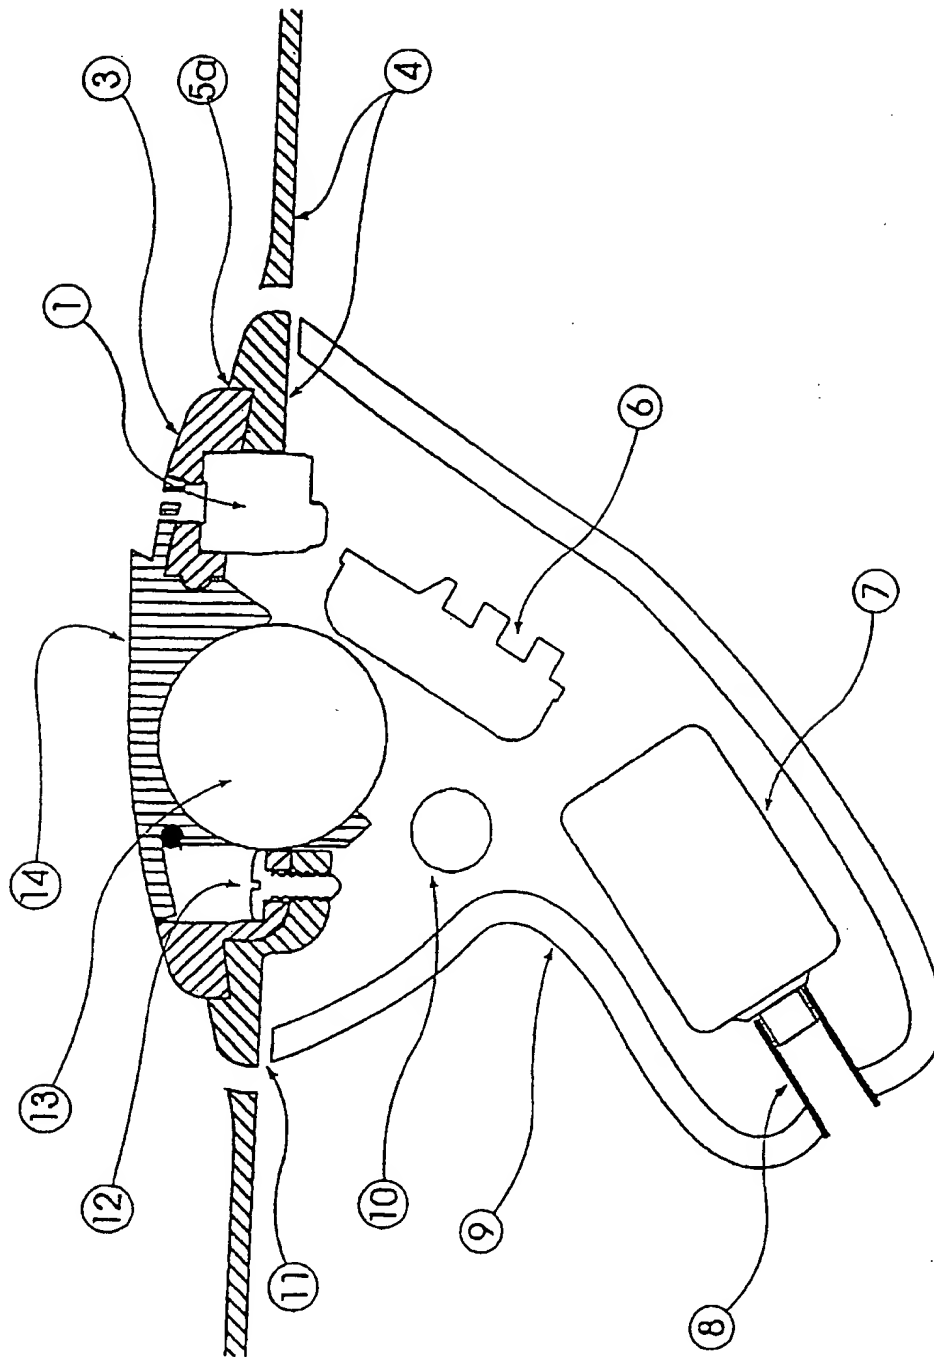


figure 1

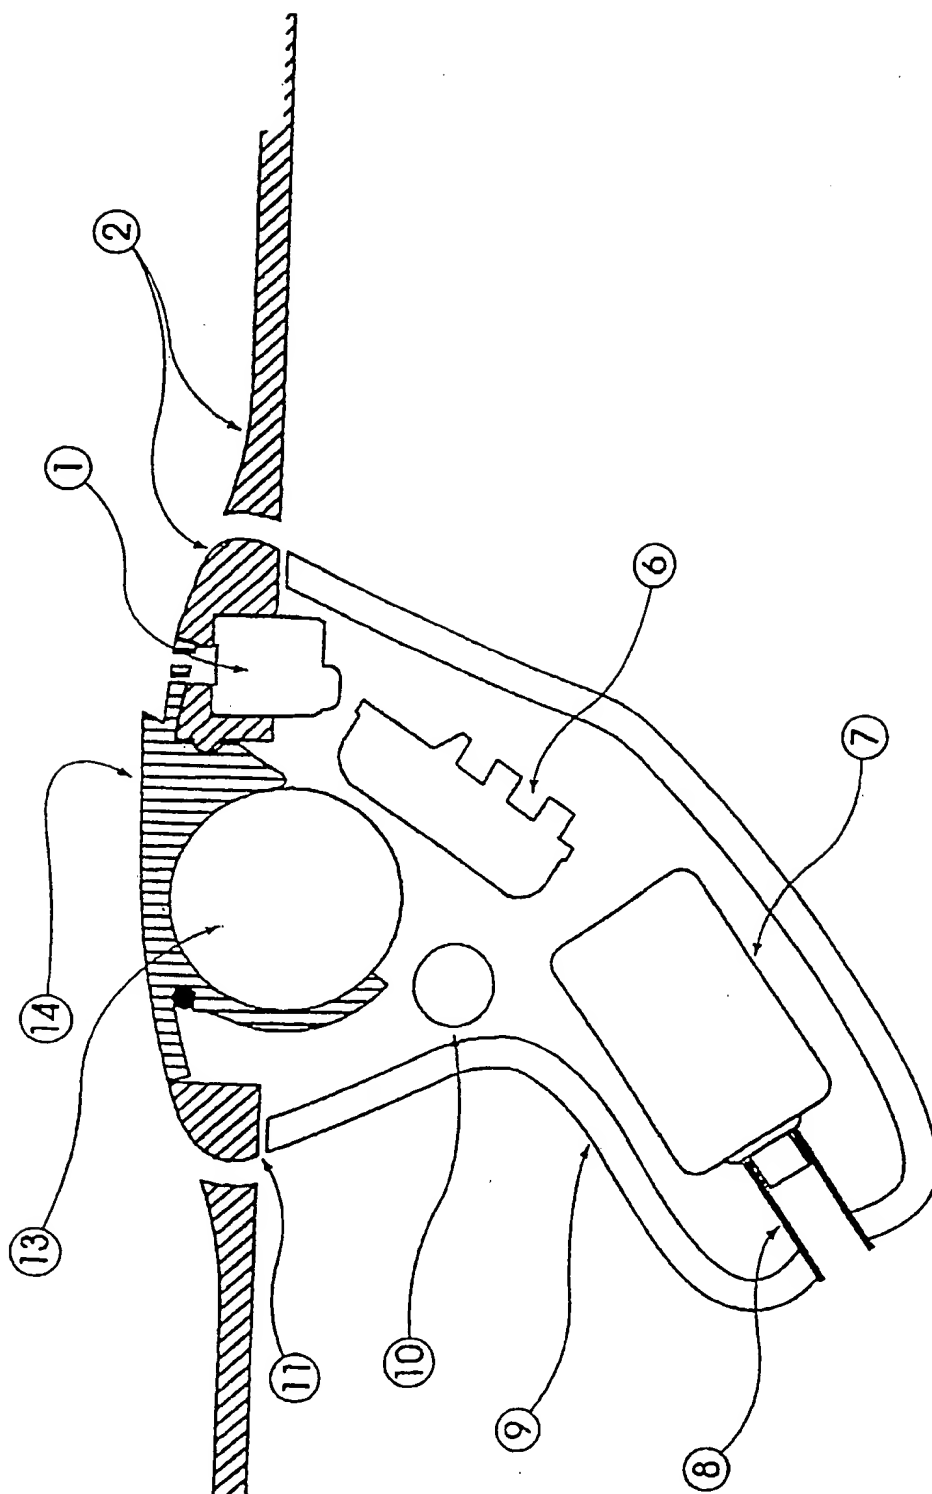


figure 2

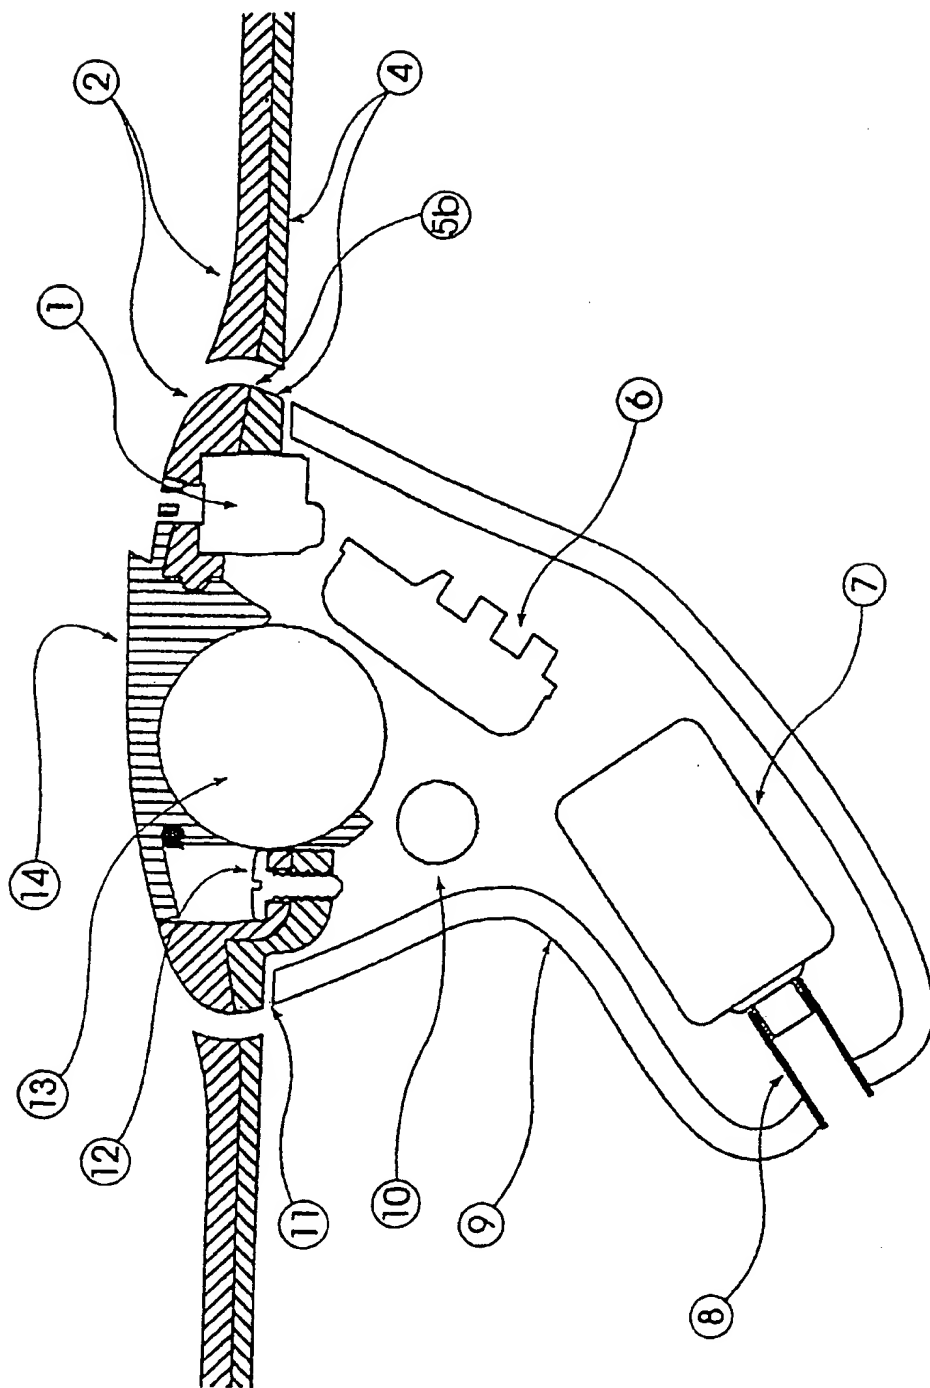



figure 3

INTERNATIONAL SEARCH REPORT

International application No.
PCT/AU 98/00888

A. CLASSIFICATION OF SUBJECT MATTER		
Int Cl ⁶ : H04R 25/02		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols) IPC H04R 25/00, H04R 25/02		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) WPAT: PLATE# OR IN () THE () EAR OR LTE OR IN () EAR JAPIO: AS ABOVE		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 521329 A1 (SIEMENS AKTIENGESELLSCHAFT) 7 January 1993 Abstract, Figs 1-3, 7, 8	1-10
A	EP 684749 A2 (COS. ELGI. S.P.A.) 29 November 1995 Abstract, Figs 4, 4A, 9, 9A	1-10
A	EP 186748 A2 (VIENNATONE GESELLSCHAFT m.b.H.) 9 July 1985 Abstract, Fig 1.	1-10
<input type="checkbox"/> Further documents are listed in the continuation of Box C <input checked="" type="checkbox"/> See patent family annex		
<p>* Special categories of cited documents:</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier application or patent but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&" document member of the same patent family</p>		
Date of the actual completion of the international search 11 November 1998		Date of mailing of the international search report 17 NOV 1998
Name and mailing address of the ISA/AU AUSTRALIAN PATENT OFFICE PO BOX 200 WODEN ACT 2606 AUSTRALIA Facsimile No.: (02) 6285 3929		Authorized officer  SERINEL SAMUEL Telephone No.: (02) 6283 2382

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/AU 98/00888

This Annex lists the known "A" publication level patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Document Cited in Search Report			Patent Family Member				
EP	521329	NONE					
EP	684749	IT	1272245	US	5675657		
EP	186748	DK	5327/85	JP	61131700	US	4657106
							END OF ANNEX